

Product Datasheet

28-Port Full Gigabit Managed Industrial Ethernet

Switch

(ONV-IPS33228FM)



OVERVIEW

The ONV-IPS33228FM is a full gigabit L2+ managed industrial Ethernet fiber switch independently developed by ONV. It has 16*10/100/1000Base-T RJ45 ports and 8*100/1000Base-X SFP ports and 4*100/1000M SFP ports(Combo port). Each port can support wire-speed forwarding.

The ONV-IPS33228FM has L2+ network management function, support IPV4/IPV6 management, static route full line-rate forwarding, security protection mechanism, ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Support multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When the one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as port traffic control, VLAN division, and SNMP through the Web network management mode. Industrial switches meet the needs

of the industrial Ethernet application environment. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, shipping, metallurgy, and green energy construction and other industrial scenarios to form a cost-effective, stable, and reliable network.

FEATURE

■ Gigabit line speed access, SFP port uplink

- ◇ All series supports Ethernet port and SFP port uplink combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

■ Strong business processing capability

- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control

■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, fan active cooling , galvanized steel casing.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, Link.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable power output.

■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

TECHNICAL SPECIFICATION

| Model | ONV-IPS33228FM |
|----------------------------------|--|
| Interface Characteristics | |
| Fixed Port | 1*Console port(115200,N,8,1) Power-off alarm switch (FAULT) 1 **AC100-240V power input port 16*10/100/1000Base-T RJ45 ports (Data) 8*100/1000Base-X uplink SFP slot ports (Data) 4*100/1000Base-X uplink SFP ports (Data)(Combo port) 2*DC12-48V power input ports (support anti-reverse protection) |
| Ethernet Port | Port 1-16 support 10/100/1000Base-T auto-sensing, Full/half duplex MDI/MDI-X self-adaption |
| Twisted Pair | 10BASE-T: Cat3,4,5 UTP(≤100 meter) |

| | |
|------------------------------|--|
| Transmission | 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter) |
| Optical Fiber Port | Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC) |
| Optical Cable/ Distance | Multi mode: 850nm / 0 ~ 500M, single mode: 1310nm / 0 ~ 40KM, 1550nm/ 0 ~ 120KM. |
| Chip Parameter | |
| Network Management Type | L2+ |
| Network Protocol | IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX , IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X, IEEE802.3x |
| Forwarding Mode | Store and Forward(Full Wire Speed) |
| Switching Capacity | 256Gbps |
| Forwarding Rate@64byte | 35.71Mpps |
| MAC | 8K |
| Buffer Memory | 8M |
| Jumbo Frame | 9.6K |
| LED Indicator | Power: PWR (yellow), System: SYS (yellow), Network: Link/Act (yellow), Fiber Port : L/A (green) |
| Reset Switch | Yes. Press and hold for 10 seconds and release to restore factory settings |
| Power Supply | |
| Total PWR / Input Voltage | 60W(AC100-240V) / (DC12-48V) |
| Power Consumption | Standby<35W, Full load<60W |


| | |
|---|--|
| Power Supply | Built-in power supply, AC100~240V 50-60Hz 0.65A |
| Power Input Interface | Power-off alarm switch Dual power input port design AC power supply priority support anti-reverse protection 1*AC100-240V power input port 2*DC12-48V power input ports Power-off automatic switching DC connection |
| Physical Parameter | |
| Heat Dissipation | Low noise, fan active cooling |
| Operation TEMP / Humidity | -40~+80°C; 5%~90% RH Non condensing |
| Storage TEMP / Humidity | -40~+85°C; 5%~95% RH Non condensing |
| Dimension (L*W*H) | 400*298*44.5mm |
| Net /Gross Weight | <5.0kg / <5.8kg |
| Installation | Desktop, 19 inch 1U cabinet installation |
| Certification & Warranty | |
| Lightning protection / protection level | Port Lightning protection: 6KV 8/20us; Protection level: IP30 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV |

| | |
|------------------------------------|--|
| | IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022):Class A IEC61000-6-2(Common Industrial Standard) |
| Mechanical Properties | IEC60068-2-6 (anti vibration) IEC60068-2-27 (anti shock) IEC60068-2-32 (free fall) |
| Certification | CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS; |
| Warranty | 5 years, lifelong maintenance. |
| Network Management Features | |
| Interface | IEEE802.3X (Full-duplex) Port temperature protection setting Port green Ethernet Energy-saving setting Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps. |
| Layer 3 Features | L2+ network management ,IPV4/IPV6 management L3 soft routing forwarding, Static route, Default route @ 128 pcs, APR @ 1024 pcs |
| VLAN | 4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC Voice VLAN, QinQ configuration Port configuration of Access, Trunk, Hybrid |
| Port Aggregation | LACP, Static aggregation Max 12 aggregation groups and 8 ports per group. |
| Spanning Tree | STP (IEEE802.1d),RSTP (IEEE802.1w),MSTP (IEEE802.1s) |
| Industrial Ring Network Protocol | G.8032 (ERPS),Recovery time less than 20ms 255 Ring at most, Max 254 devices per ring. |


| | |
|----------------|--|
| Multicast | MLD Snooping v1/v2, Multicast VLAN IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out |
| Port Mirroring | Bidirectional data mirroring based on port |
| QoS | Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR) |
| ACL | Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc. |
| Security | IP-MAC-VLAN-Port binding ARP inspection, Anti-DoS attack AAA & RADIUS, MAC learning limit Mac black holes, IP source protection IEEE802.1X & MAC address authentication Broadcast storm control, Backup for host datum SSH 2.0, SSL, Port isolation, ARP message speed limit User hierarchical management and password protection |
| DHCP | DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay |
| Management | One-key recovery Cable Diagnose, LLDP Web Management (HTTPS) NTP, System work log, Ping Test CPU instant utilization status view Console/AUX Modem/Telnet/SSH2.0 CLI Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP |

| | |
|--------|--|
| | V1/V2C/V3 ONV NMS - smart network management system platform(LLDP+SNMP) |
| System | Category 5 Ethernet network cable Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later; TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network |

DIMENSION

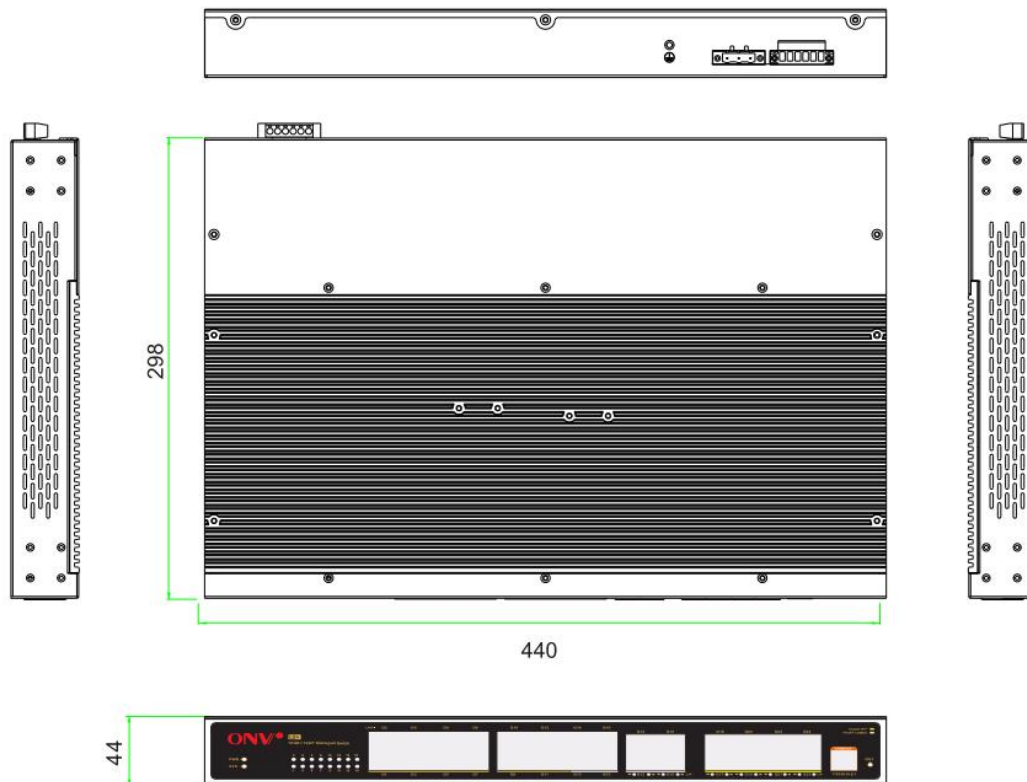

APPLICATION

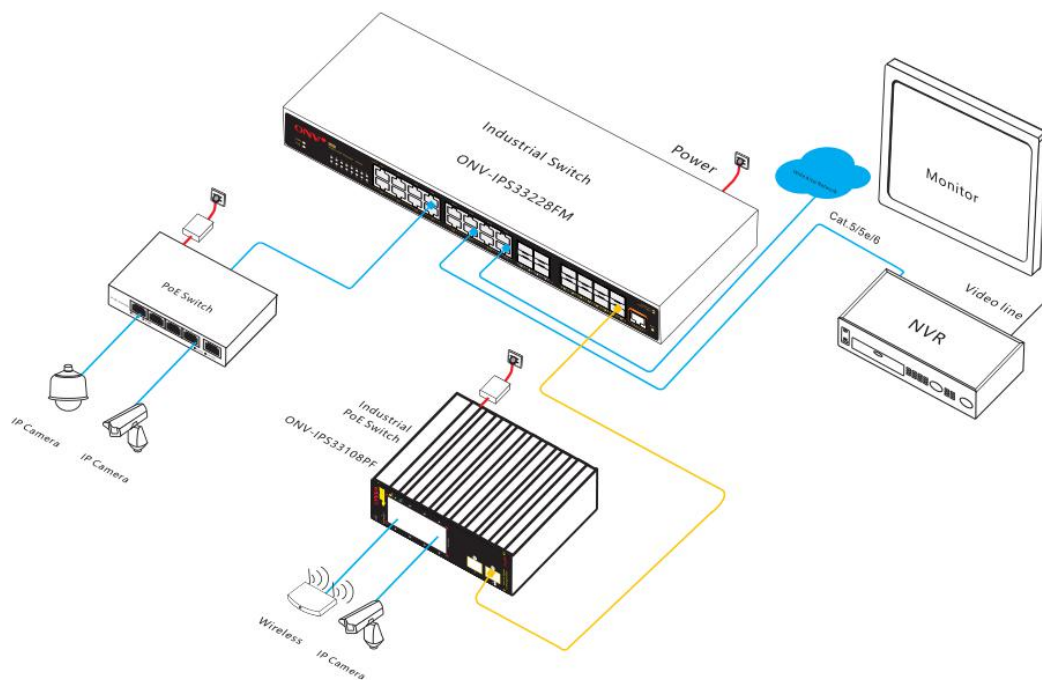

ORDERING INFORMATION

| Model | Description | Power Supply |
|----------------|---|--------------|
| ONV-IPS33228FM | L2+ managed industrial Ethernet fiber switch with 16* 10/100/1000M RJ45 ports and 8*100/1000M uplink SFP ports and 4*100/1000M uplink SFP ports (combo ports). it supports DC and AC redundant power input and 1U/19 inch cabinet installation. | 60W |

Note: SFP optical module needs to be purchased separately. Please refer to the optical module information

PACKING LIST

| PACKING LIST | CONTENT | QTY | UNIT |
|--------------|---|-----|------|
| | 28-port full gigabit managed industrial Ethernet fiber switch | 1 | SET |
| | AC Power Cable | 1 | PC |
| | RJ45-DB9 Line | 1 | PC |
| | Mounting Kits | 1 | SET |
| | User Guide | 1 | PC |
| | Warranty Card | 1 | PC |

OPTICAL MODULE INFORMATION

| Product | Model | Description | Unit |
|----------------------------|------------|--|------|
| 1.25G Optical Module | ONV-2630 | SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2632 | SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2612-T | SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2613-R | SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug | PC |

| | | | |
|--------------|---------------|--|----|
| | | and pull. | |
| | ONV-2612-T-G | Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2613-R-G | Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2612-T-SC | SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull. | PC |
| | ONV-2613-R-SC | SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull. | PC |
| Power Module | ONV-2633 | 1.25G SFP optical module transfers to 10/100/1000M RJ45 port. | PC |

RELATED PRODUCT

| Model | Description |
|----------------|--|
| ONV-IPS33018FM | L2+ managed industrial Ethernet fiber switch with 16* 10/100/1000M RJ45 ports and 2*100/1000M uplink SFP ports. Built-in 60W power supply. it supports dual DC and AC redundant power input and 1U/19 inch cabinet installation. |
| ONV-IPS33026FM | L2+ managed industrial Ethernet fiber switch with 24* 10/100/1000M |

| | |
|----------------|--|
| | RJ45 ports and 4*100/1000M uplink SFP ports (combo ports). Built-in 60W power supply. it supports dual DC and AC redundant power input and 1U/19 inch cabinet installation. |
| ONV-IPS38028FM | L3 managed industrial Ethernet fiber switch with 24* 10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ ports. Built-in 60W power supply. it supports dual DC and AC redundant power input and 1U/19 inch cabinet installation. |
| ONV-IPS38048FM | L3 managed industrial Ethernet fiber switch with 48* 10/100/1000M RJ45 ports and 4*1/10G uplink SFP+ ports. Built-in 60W power supply. it supports dual DC and AC redundant power input and 1U/19 inch cabinet installation. |
| ONV-IPS38368FM | L3 managed industrial Ethernet fiber switch with 8* 10/100/1000M RJ45 ports and 24*100/1000M uplink SFP ports and 4*1/10G uplink SFP+ ports. Built-in 60W power supply. it supports dual DC and AC redundant power input and 1U/19 inch cabinet installation. |
| ONV-IPS38448FM | L3 managed industrial Ethernet fiber switch with 12* 10/100/1000M RJ45 ports and 28*100/1000M uplink SFP ports and 4*1/10G uplink SFP+ ports. Built-in 60W power supply. it supports dual DC and AC redundant power input and 1U/19 inch cabinet installation. |

CONTACT US

ONV OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Website: www.onvcom.com

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen,

China

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang

Street, Longhua District, Shenzhen, China

