

Product Datasheet

28-port 10G Uplink L3 Managed Industrial Ethernet Switch

(ONV-IPS38028FM)



OVERVIEW

The ONV-IPS38028FM is a 10G uplink L3 managed industrial Ethernet fiber switch independently developed by ONV. It has 24*10/100/1000Base-T RJ45 ports and 4*1/10G SFP+ fiber slot ports. Each port can support wire-speed forwarding.

The ONV-IPS38028FM has L3 full network management, supports IPV4/IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, perfect ACL/QoS policy, and rich VLAN functions, easy to manage and maintain. With industry-leading ring network technology. It supports a variety of industrial-grade redundant ring network protocols, and each port can form a ring network, supporting chain ring network, starring network, double starring network, ring network, tangent network ring network, intersecting ring network, coupled ring network, self-healing within 20ms of the ring network. The switches series has high reliability, high security, and high manageability, ensures reliable transmission of key data, supports remote management, and cooperates with the ONV-NMS network management platform for cluster management to achieve no blind spot network management throughout the process. The products completely follow the industrial product design and materials. The

shell is made of metal material to enhance heat dissipation. It has excellent adaptability to the industrial site environment (including mechanical stability, climate environment adaptability, electromagnetic environment adaptability, etc.). The protection level is IP40. It can support a dual redundant power supply. Low power consumption, no fan heat dissipation technology, MTBF reach 35 years, 5 years warranty. It meets the needs of various industrial Ethernet application environments. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy, and green energy. Industrial scenes such as construction set up a cost-effective and stable communication network.

FEATURE

■ Gigabit access, 10G uplink

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Supports Gigabit Ethernet port and 10G SFP+ uplink port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Strong business processing capability

- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.

■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, storm control.

- ◇ IP-MAC-VLAN-Port binding.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable power output.
- ◇ Low power consumption, no fan. Galvanized steel shell and aluminum alloy heat dissipation plate combination.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, SYS, Link.

■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

TECHNICAL SPECIFICATION

Model	ONV-IPS36028FM	ONV-IPS38028FM
Interface Characteristics		
Fixed Port	2*AC100-240V input ports Alarm switch port (FAULT) 1*Console port (115200, N, 8,1) 4*1/10G uplink SFP+ ports (Data) 24*10/100/1000Base-T RJ45 ports (Data) 1 group of DC12-57V input ports (Support reverse polarity protection function)	
Ethernet Port	Port 1-24 support 10/100/1000Base-T auto-sensing, Full/half duplex	

	MDI/MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)	
Optical Fiber Port	1/10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)	
Optical Fiber Port Expansion	Support Turbo overclocking 2.5G optical module expansion and ring network	
Optical Cable/ Distance	Multi-mode: 850nm / 0~500M, 0~300M(10G), Single-mode: 1310nm / 0~ 40KM, 1550nm / 0~120KM.	
Chip Parameter		
Network Management	L2+	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3ae 10GBase-SR/LR, IEEE802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	598Gbps (non-blocking)	
Forwarding Rate@64byte	95.23Mpps	
CPU	500MHz	
DRAM	2G	
FLASH	128M	
MAC	32K	
Buffer Memory	32M	
Jumbo Frame	9.6K	
LED Indicator	Power: PWR(Yellow), System: SYS (Yellow), Network:Link (Yellow),	

	Fiber port: L/A (Green)
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings
Power Supply	
Total PWR / Input Voltage	60W (AC100-240V)
Power Consumption	Standby<25W, Full Load<45W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 0.65A
Power Input Port	1 group of DC12-57V input port, Alarm switch port, 2 group of AC power input ports Dual input power port design: AC power supply priority, support anti-reverse protection, power-off automatic switching DC connection.
Physical Parameter	
Operation TEMP / Humidity	-40~+80°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+85°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*298*44mm
Net /Gross Weight	<4.8kg / <5.5kg
Installation	Desktop, 19 inch 1U cabinet installation
Certification & Warranty	
Lightning Protection	Lightning protection: 6KV 8/20us, Protection level: IP30 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)


	<p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m , 1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022):Class B</p> <p>IEC61000-6-2(Common Industrial Standard)</p>	
Mechanical Properties	<p>IEC60068-2-6 (anti vibration)</p> <p>IEC60068-2-27 (anti shock)</p> <p>IEC60068-2-32 (free fall)</p>	
Certification	<p>CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS</p>	
Warranty	<p>5 years, lifelong maintenance.</p>	
Network Management Features		
Interface	<p>IEEE802.3X (Full-duplex)</p> <p>Port temperature protection setting</p> <p>No connection port automatic sleep</p> <p>Port green Ethernet Energy-saving setting</p> <p>Broadcast storm control based on port speed</p> <p>SFP+ optical port DDMI real-time digital diagnosis</p> <p>The speed limit of the message flow in the access port, minimum particle size is 64Kbps.</p>	
Layer 3 Features	<p>L2+ network management</p> <p>ARP protocol, maximum 1024 entries</p> <p>IPV4/IPV6 static route/default route supports up to 128 entries</p> <p>Layer 3 routing and forwarding, support communication between</p>	<p>IPV4 Equal Cost Routing</p> <p>NG protocol, maximum 1000 entries</p> <p>ARP protocol, maximum 1000 entries</p> <p>Pingv6, Telnetv6, TFTPv6,</p>

	different network segments and different VLANs	<p>DNSv6, ICMPv6</p> <p>IPV4/IPV6 VRRP, the maximum group is 255</p> <p>IPV4/IPV6 VLANIF interface supports up to 128</p> <p>IPV4/IPV6 static route/default route supports up to 128 entries</p> <p>IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries</p> <p>IPV6 dynamic routing OSPFv3, BGP+, RIPng, IPV6 management, 1000 routing entries</p> <p>L3 network management function, IPV4/IPV6 dual-stack management</p> <p>Layer 3 routing and forwarding, support communication between different network segments and different VLANs</p>
VLAN	<p>Port configuration of Access, Trunk, Hybrid.</p> <p>VLAN based on MAC, VLAN based on the protocol</p> <p>Voice VLAN, QinQ configuration, 4K VLAN based on port, IEEE802.1q</p>	
Port Aggregation	<p>LACP, Static aggregation</p> <p>Max 14 aggregation groups and 8 ports per group.</p>	
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)	
Industrial Ring	G.8032 (ERPS), Recovery time less than 20ms	

Network Protocol	250 Ring at most, Max 250 devices per ring.
Multicast	MLD Snooping v1/v2, Multicast VLAN IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.
Security	IEEE802.1X & MAC address authentication Broadcast storm control, Backup for host datum SSH 2.0, SSL, Port isolation, ARP message speed limit User hierarchical management and password protection IP-MAC-VLAN-Port binding, ARP inspection, Anti-DoS attack AAA & RADIUS, MAC learning limit, Mac black holes, IP source protection
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	CPU instant utilization status view One-key recovery, Cable Diagnose, LLDP Console /AUX Modem /Telnet /SSH2.0 CLI Web Management (HTTPS), NTP, System work log, Ping Test Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3


	ONV NMS-Smart Network Management System Platform (LLDP+SNMP)
System	Category 5 Ethernet network cable Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later. TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network

DIMENSION

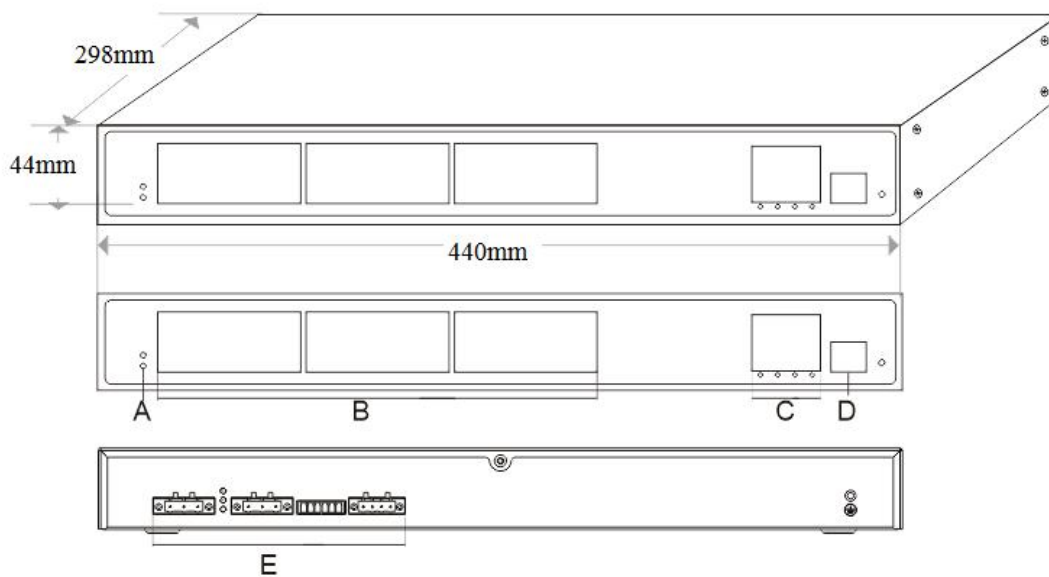

- A. Working indicator
- B. 24*10/100/1000M RJ45 ports
- C. 4*1/10G SFP+ ports
- D. Console port
- E. 2AC+DC power terminal input port

APPLICATION

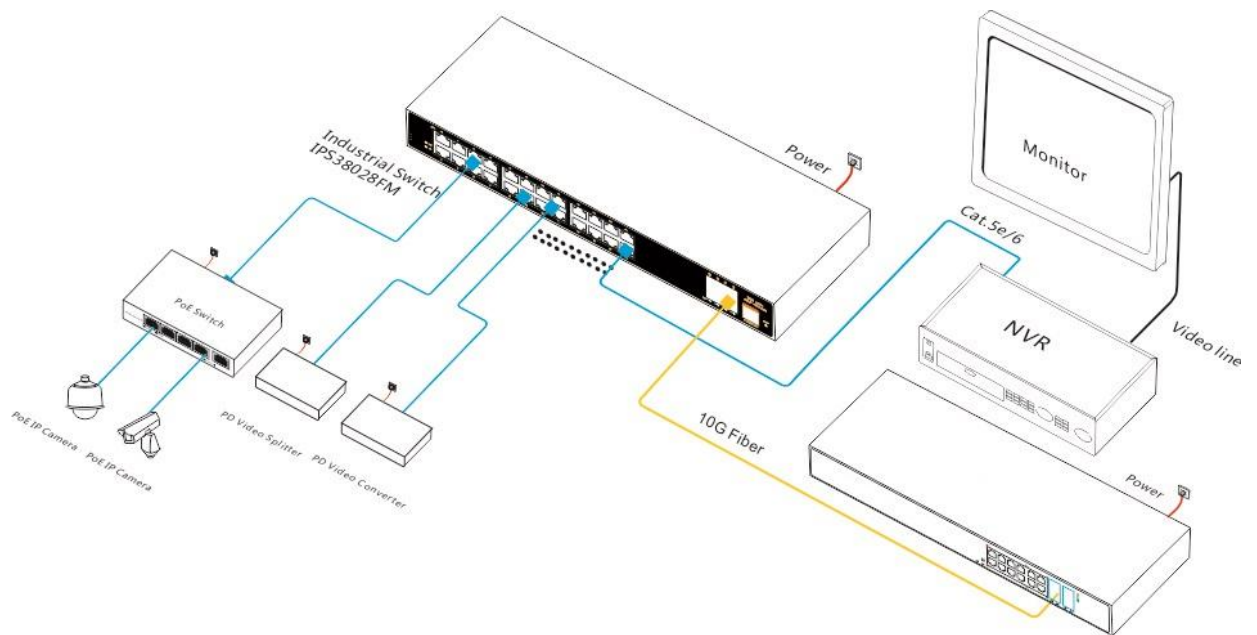

ORDERING INFORMATION

Model	Description	Recommended Power
ONV-IPS36028FM	L2+ managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.	2*60W
ONV-IPS38028FM	L3 managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.	2*60W

Note: The SFP optical module is not included by default and needs to be purchased separately.

PACKING LIST

PACKING LIST	CONTENT	QTY	UNIT
	28-port 10G uplink L3 managed industrial Ethernet switch	1	SET
	RJ45-DB9 Line	1	PC
	AC Power Cable	1	PC
	Mounting Kits (Hanging Ear)	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

OPTICAL MODULE INFORMATION

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G, multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	2632-G	Industrial SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km,	PC

		SC interface, support DDM function, support hot plug and pull.	
	2613-R-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
10G Optical Module	6630-G	Industrial SFP+ optical module, 10G, Multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, support DDM function, support hot plug and pull.	PC
	7832-G	Industrial SFP+ optical module, 10G, Single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-33-G	Industrial SFP+ optical module, 10G, Single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-27-G	Industrial SFP+ optical module, 10G, Single-mode single fiber TX1270nm/RX13300nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC

RELATED PRODUCT

Model	Description
ONV-IPS33018FM	L2+ managed industrial Ethernet fiber switch with 16*10/100/1000M RJ45 ports and 2*100/1000M SFP slot ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.

ONV-IPS33026FM	L2+ managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 2*100/1000M SFP slot ports (including 2 set combo ports). Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38036FM	L3 managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 8*100/1000M SFP slot ports and 4*1/10G SFP+ slot ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38048FM	L3 managed industrial Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G SFP+ slot ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38368FM	L3 managed industrial Ethernet fiber switch with 8*10/100/1000M RJ45 ports and 24*100/1000M SFP slot ports and 4*1/10G SFP+ slot ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.
ONV-IPS38448FM	L3 managed industrial Ethernet fiber switch with 12*10/100/1000M RJ45 ports and 28*100/1000M SFP slot ports and 4*1/10G SFP+ slot ports. Built-in redundant dual power supply. support 2AC+DC power terminal input and 1U/19-inch cabinet installation.

CONTACT US

ONV OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Website: www.onvcom.com

Email/Skype/WeChat ID: onv@onv.com.cn

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang Street, Longhua District, Shenzhen.

