

Product Datasheet

52-port 10G Uplink L3 Managed Industrial Ethernet Switch

(ONV-IPS58052FM)



OVERVIEW

The ONV-IPS58052FM is a 10G uplink L3 managed industrial Ethernet switch independently developed by ONV. It has 48*10/100/1000Base-T RJ45 ports and 4*1/10G SFP+ fiber slot ports. Each port can support wire-speed forwarding.

The ONV-IPS58052FM has L3 network management function, supports IPV4/IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application needs, port management, routing address management, port flow control, VLAN division, IGMP, security policy and other application services are configured through network management methods such as Web, CLI, SNMP, Telnet, etc. It is suitable for intelligent

transportation, rail transit, electric power, mining, metallurgy, and green energy. industrial scenes such as construction set up a cost-effective and stable communication network.

FEATURE

■ Gigabit wire speed access, 10G uplink

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit Ethernet port and 10G uplink SFP+ port to meet the networking requirements of various scenarios.

■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

■ Strong business processing capability

- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, No fan, galvanized steel case.

- ◇ Self-developed power supply, high redundancy design, providing a long term and stable power output.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link.

■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

TECHNICAL SPECIFICATION

Model	ONV-IPS58052FM
Interface Characteristics	
Fixed Port	2*AC100-240V input ports Alarm switch port (FAULT) 1*Console port (115200, N, 8,1) 4*1/10G uplink SFP+ ports (Data) 48*10/100/1000Base-T RJ45 ports (Data) 1 group of DC12-48V input ports (Support reverse polarity protection function)
Ethernet Port	Port 1-48 support 10/100/1000Base-T auto-sensing, full/half duplex MDI/MDI-X self-adaption
Optical Fiber Port	Gigabit SFP optical fiber port and 10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)

Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meters) 100BASE-TX: Cat5 or later UTP(≤100 meters) 1000BASE-T: Cat5e/6 or later UTP(≤100 meters)
SFP Port Expansion	Turbo overclocking 2.5G optical module and ring
Optical Cable/ Distance	Multi-mode: 850nm / 0-500M(1G), 850nm / 0-300M(10G), Single-mode: 1310nm / 0-40KM, 1550nm / 0-120KM.
Chip Parameter	
Network Management Type	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-LR/SR, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	368Gbps
Forwarding Rate@64byte	131Mpps
CPU	Dual-core 1GHz
DRAM	2GB
FLASH	256MB
MAC	32K
Buffer Memory	16MB
Jumbo Frame	12KB
LED Indicator	Power: PWR (Yellow), System:SYS (Yellow), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings
Power	
Total PWR / Input	60W (AC100-240V)

Voltage	
Power Consumption	Standby:<35W, Full load:<60W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 0.65A
Power Supply	2 group of DC12-48V input port
Interface	Alarm switch port, 1 group of AC power input ports
	Dual input power port design: AC power supply priority, support anti-reverse protection, power-off automatic switching DC connection.
Physical Parameter	
Operation TEMP / Humidity	-40~+75°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+80°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*298*44mm
Net /Gross Weight	<5.0kg / <5.8kg
Installation	Desktop, 19 inch 1U cabinet
Certification & Warranty	
Lightning Protection	<p>Lightning protection: 6KV 8/20us; Protection level: IP40</p> <p>IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge</p> <p>IEC61000-4-3(RS):10V/m(80~1000MHz)</p> <p>IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV</p> <p>IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV</p> <p>IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)</p> <p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022):Class B</p>

	IEC61000-6-2(Common Industrial Standard)
Mechanical Properties	IEC60068-2-6 (anti vibration) IEC60068-2-27 (anti shock) IEC60068-2-32 (free fall)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	5 years, lifelong maintenance.


Network Management Features

Interface	IEEE802.3x flow control (full duplex) Port exception protection mechanism Port real-time flow management (Flow Interval) Broadcast storm suppression based on port rate Optical port SFP module DDMI real-time digital diagnosis Limit the rate of incoming and outgoing packet traffic, with a minimum granularity of 16Kbps and a maximum of 1Gbps Port EEE Green Ethernet Energy-Saving configuration and status view Jumbo frame configuration, the largest 12000byte
Layer 3 Features	IPV4 Equal Cost Routing NG protocol, maximum 1000 entries ARP protocol, maximum 1000 entries Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6 IPV4/IPV6 VRRP, the maximum group is 255 IPV4/IPV6 VLANIF interface supports up to 128 IPV4/IPV6 static route/default route supports up to 128 entries L3 network management function, IPV4/IPV6 dual-stack management IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries IPV6 dynamic routing OSPFv3, BGP+, RIPng, IPV6 management, 1000 routing entries Layer 3 routing and forwarding, support communication between

	different network segments and different VLANs
VLAN	VLAN based on MAC, VLAN based on the protocol Port configuration of Access, Trunk, Hybrid, GVRP VLAN protocol (4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration
Port Aggregation	LACP, Static aggregation Max 26 aggregation groups and 8 ports per group.
Spanning Tree	STP BPDU Guard, BPDU filtering and BPDU forwarding STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
ERPS Ring Network	Support ERPS ring network, ring network self-healing time is less than 20ms, ITU-T G.8032
Multicast	MLD Snooping, IGMP Snooping, Multicast VLAN User quick log out, MVR (Multicast LAN registration) IGMP Snooping v1/v2/v3 and 1024 multicast groups at most
Mirroring	Bidirectional traffic mirroring for basic ports Supports 1-to-multiple mirroring, supports up to 4 port sessions
QoS	Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Rate Limiting, Stream based redirection Flow-based Packet Filtering, 8*Output queues of each port 802.1p/DSCP priority mapping, Diff-Serv QoS, Priority Mark/Remark
ACL	ACL distribution based on port and VLAN L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	Port based IEEE802.1X authentication SSL guarantees data transmission security Quad binding function of IP+MAC+VLAN+ports MAC address learning limit, MAC address black hole Anti DoS attack, Port broadcast message suppression


	<p>IP Source Guard function, AAA&RADIUS certification</p> <p>Hierarchical user management and password protection</p> <p>SSH 2.0 provides a secure encrypted channel for user login</p> <p>Host data backup mechanism, ARP intrusion detection function</p> <p>Port isolation, IP Source Guard, ARP message speed limit function</p>
DHCP	DHCP Client, DHCP Snooping, DHCP Server
Management	<p>Web network management (https)</p> <p>Link Layer Discovery Protocol(LLDP)</p> <p>Viewing CPU Instant Utilization Status</p> <p>NTP clock, One click restore, SNMP V1/V2C/V3</p> <p>Cable status check, Ping detection, System work log</p> <p>ONV NMS platform cluster management (LLDP+SNMP)</p> <p>Console/AUX Modem/Telnet/CLI command line configuration</p> <p>FTP, TFTP, Xmodem, SFTP file upload and download management</p>
System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>

DIMENSION

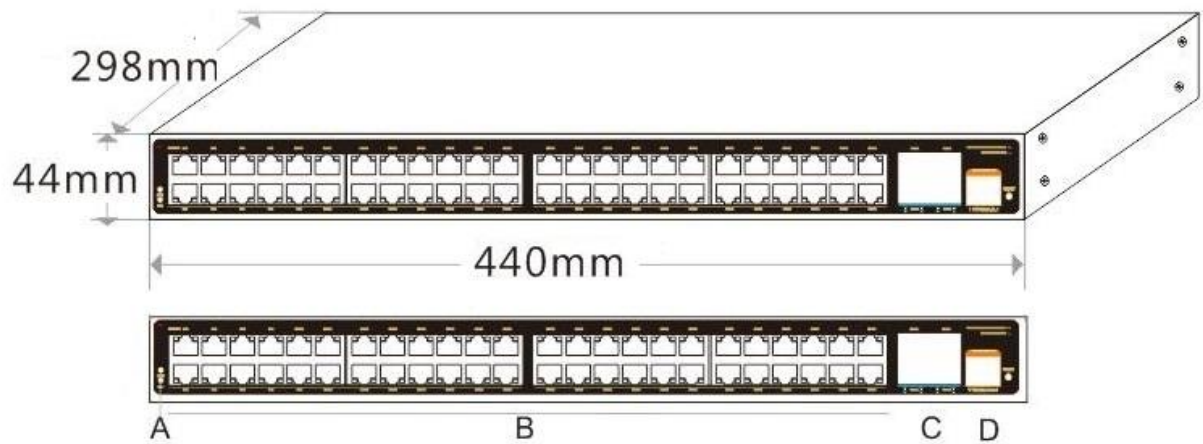

- A. Working indicator B. 48*10/100/1000M RJ45 ports
- C. 4*1/10G SFP+ ports D. Console port

APPLICATION

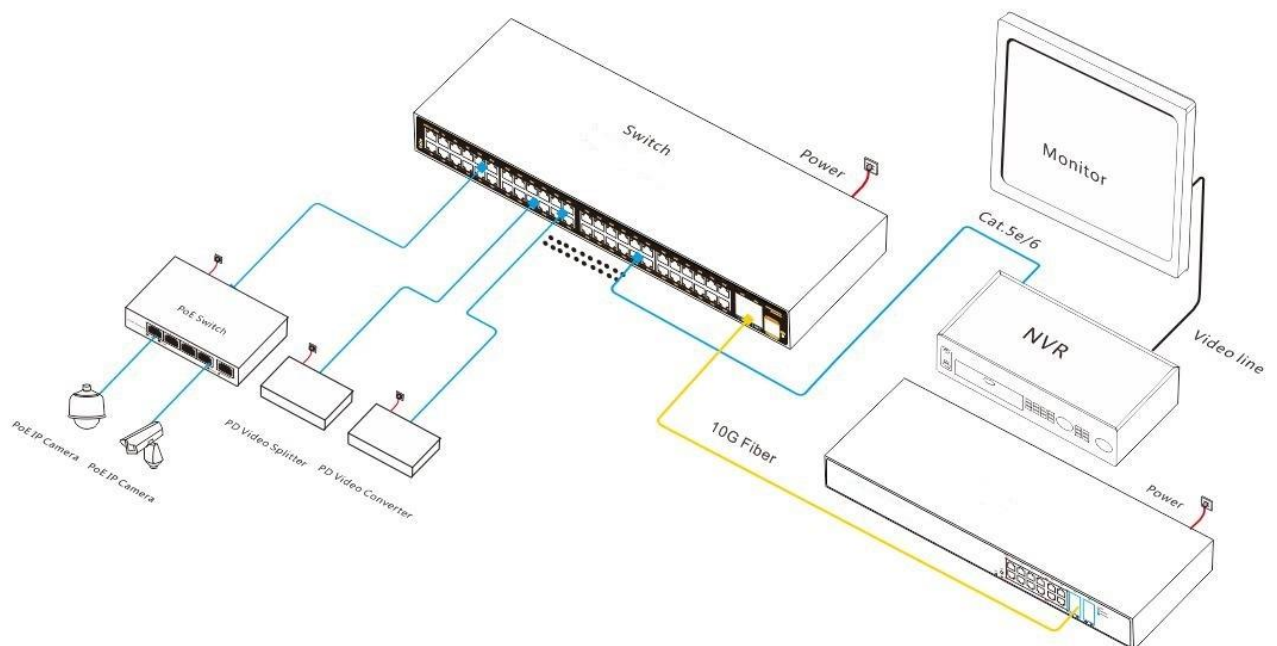

ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-IPS58052FM	L3 managed industrial Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).	2*60W

Note: The SFP optical module is not included by default and needs to be purchased separately.

PACKING LIST

	Content	Qty	Unit
Packing List	52-port 10G uplink L3 managed industrial Ethernet switch	1	SET
	AC Power Cable	1	PC
	Mounting Kits	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G, multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	2632-G	Industrial SFP optical module, 1.25G, single-mode dual fiber	PC

		1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	
	2612-T-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
10G Optical Module	6630-G	Industrial SFP+ optical module, 10G, multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, support DDM function, support hot plug and pull.	PC
	7832-G	Industrial SFP+ optical module, 10G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-33-G	Industrial SFP+ optical module, 10G, single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-27-G	Industrial SFP+ optical module, 10G, Single-mode single fiber TX1270nm/RX13300nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC

RELATED PRODUCT

Model	Description
ONV-IPS58028FM	L3 managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in 60W dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).
ONV-IPS58036FM	L3 managed industrial Ethernet fiber switch with 16*10/100/1000M RJ45 ports and 8*10/100/1000M RJ45 or 8*100/1000M SFP combo ports and 4*1/10G SFP+ ports. Built-in 60W dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).
ONV-IPS58368FM	L3 managed industrial Ethernet fiber switch with 16*100/1000M SFP ports and 8*10/100/1000M RJ45 or 8*100/1000M SFP combo ports and 4*1/10G SFP+ ports. Built-in 60W dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).

CONTACT US

ONV Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang

Street, Longhua District, Shenzhen

