

## Product Datasheet

# 28-port 10G Uplink L3 Managed Industrial Ethernet Switch

(ONV-IPS58028FM)



## OVERVIEW

The ONV-IPS58028FM is a 10G uplink L3 managed industrial Ethernet switch independently developed by ONV. It has 24\*10/100/1000Base-T RJ45 ports and 4\*1/10G SFP+ fiber slot ports. Each port can support wire-speed forwarding.

The ONV-IPS58028FM has L3 network management function, supports IPV4/IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application needs, port management, routing address management, port flow control, VLAN division, IGMP, security policy and other application services are configured through network management methods such as Web, CLI, SNMP, Telnet, etc. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy, and green energy. industrial

scenes such as construction set up a cost-effective and stable communication network.

## FEATURE

### ■ Gigabit wire speed access, 10G uplink

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit Ethernet port and 10G uplink SFP+ port to meet the networking requirements of various scenarios.

### ■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

### ■ Strong business processing capability

- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, No fan, galvanized steel case.
- ◇ Self-developed power supply, high redundancy design, providing a long term and

stable power output.

- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link.

#### ■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

## TECHNICAL SPECIFICATION

Model	ONV-IPS58028FM
<b>Interface Characteristics</b>	
Fixed Port	2*AC100-240V input ports Alarm switch port (FAULT) 1*Console port (115200, N, 8,1) 4*1/10G uplink SFP+ ports (Data) 24*10/100/1000Base-T RJ45 ports (Data) 1 group of DC12-48V input ports (Support reverse polarity protection function)
Ethernet Port	Port 1-24 support 10/100/1000Base-T auto-sensing, full/half duplex MDI/MDI-X self-adaption
Optical Fiber Port	Gigabit SFP optical fiber port and 10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Twisted Pair	10BASE-T: Cat3,4,5 UTP(≤100 meters)

Transmission	100BASE-TX: Cat5 or later UTP(≤100 meters) 1000BASE-T: Cat5e/6 or later UTP(≤100 meters)
SFP Port Expansion	Turbo overclocking 2.5G optical module and ring
Optical Cable/ Distance	Multi-mode: 850nm / 0-500M(1G), 850nm / 0-300M(10G), Single-mode: 1310nm / 0-40KM, 1550nm / 0-120KM.
<b>Chip Parameter</b>	
Network Management Type	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-LR/SR, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	336Gbps
Forwarding Rate@64byte	95.23Mpps
CPU	800MHz
DRAM	1GB
FLASH	128MB
MAC	16K
Buffer Memory	12MB
Jumbo Frame	12KB
LED Indicator	Power: PWR (Yellow), System:SYS (Yellow), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings
<b>Power</b>	
Total PWR / Input	60W (AC100-240V)

Voltage	
Power Consumption	Standby:<35W, Full load:<60W
Power Input Interface	Built-in power supply, AC 100~240V 50-60Hz 0.65A
Power Supply	2 group of DC12-48V input port Alarm switch port, 1 group of AC power input ports Dual input power port design: AC power supply priority, support anti-reverse protection, power-off automatic switching DC connection.
<b>Physical Parameter</b>	
Operation TEMP / Humidity	-40~+75°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+80°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*298*44mm
Net /Gross Weight	<5.0kg / <5.6kg
Installation	Desktop, 19 inch 1U cabinet
<b>Certification &amp; Warranty</b>	
Lightning Protection	Lightning protection: 6KV 8/20us; Protection level: IP40 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV

	IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022):Class B IEC61000-6-2(Common Industrial Standard)
Mechanical Properties	IEC60068-2-6 (anti vibration) IEC60068-2-27 (anti shock) IEC60068-2-32 (free fall)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	5 years, lifelong maintenance.

### Network Management Features


Interface	IEEE802.3x flow control (full duplex) Port exception protection mechanism Port real-time flow management (Flow Interval) Broadcast storm suppression based on port rate Optical port SFP module DDMI real-time digital diagnosis Limit the rate of incoming and outgoing packet traffic, with a minimum granularity of 16Kbps and a maximum of 1Gbps Port EEE Green Ethernet Energy-Saving configuration and status view Jumbo frame configuration, the largest 12000byte
Layer 3 Features	IPV4 Equal Cost Routing NG protocol, maximum 1000 entries ARP protocol, maximum 1000 entries Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6 IPV4/IPV6 VRRP, the maximum group is 255 IPV4/IPV6 VLANIF interface supports up to 128 IPV4/IPV6 static route/default route supports up to 128 entries L3 network management function, IPV4/IPV6 dual-stack management IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries IPV6 dynamic routing OSPFv3, BGP+, RIPng, IPV6 management, 1000

	<p>routing entries</p> <p>Layer 3 routing and forwarding, support communication between different network segments and different VLANs</p>
VLAN	<p>VLAN based on MAC, VLAN based on the protocol</p> <p>Port configuration of Access, Trunk, Hybrid, GVRP VLAN protocol (4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration</p>
Port Aggregation	<p>LACP, Static aggregation</p> <p>Max 14 aggregation groups and 8 ports per group.</p>
Spanning Tree	<p>STP BPDU Guard, BPDU filtering and BPDU forwarding</p> <p>STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)</p>
ERPS Ring Network	<p>Support ERPS ring network, ring network self-healing time is less than 20ms, ITU-T G.8032</p>
Multicast	<p>MLD Snooping, IGMP Snooping, Multicast VLAN</p> <p>User quick log out, MVR (Multicast LAN registration)</p> <p>IGMP Snooping v1/v2/v3 and 1024 multicast groups at most</p>
Mirroring	<p>Bidirectional traffic mirroring for basic ports</p> <p>Supports 1-to-multiple mirroring, supports up to 4 port sessions</p>
QoS	<p>Queue Scheduling Algorithm (SP, WRR, SP+WRR)</p> <p>Flow-based Rate Limiting, Stream based redirection</p> <p>Flow-based Packet Filtering, 8*Output queues of each port</p> <p>802.1p/DSCP priority mapping, Diff-Serv QoS, Priority Mark/Remark</p>
ACL	<p>ACL distribution based on port and VLAN</p> <p>L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.</p>
Security	<p>Port based IEEE802.1X authentication</p> <p>SSL guarantees data transmission security</p> <p>Quad binding function of IP+MAC+VLAN+ports</p>

	<p>MAC address learning limit, MAC address black hole</p> <p>Anti DoS attack, Port broadcast message suppression</p> <p>IP Source Guard function, AAA&amp;RADIUS certification</p> <p>Hierarchical user management and password protection</p> <p>SSH 2.0 provides a secure encrypted channel for user login</p> <p>Host data backup mechanism, ARP intrusion detection function</p> <p>Port isolation, IP Source Guard, ARP message speed limit function</p>
DHCP	DHCP Client, DHCP Snooping, DHCP Server
Management	<p>Web network management (https)</p> <p>Link Layer Discovery Protocol(LLDP)</p> <p>Viewing CPU Instant Utilization Status</p> <p>NTP clock, One click restore, SNMP V1/V2C/V3</p> <p>Cable status check, Ping detection, System work log</p> <p>ONV NMS platform cluster management (LLDP+SNMP)</p> <p>Console/AUX Modem/Telnet/CLI command line configuration</p> <p>FTP, TFTP, Xmodem, SFTP file upload and download management</p>
System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>




## DIMENSION

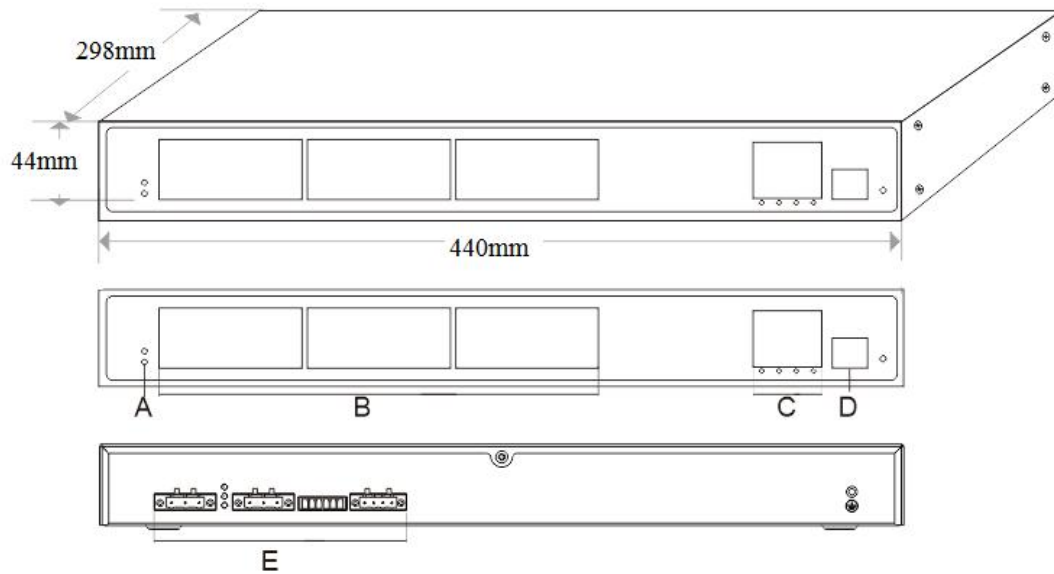

- A. Working indicator
- B. 24\*10/100/1000M RJ45 ports
- C. 4\*1/10G SFP+ ports
- D. Console port
- E. 2AC+DC power terminal input port

## APPLICATION

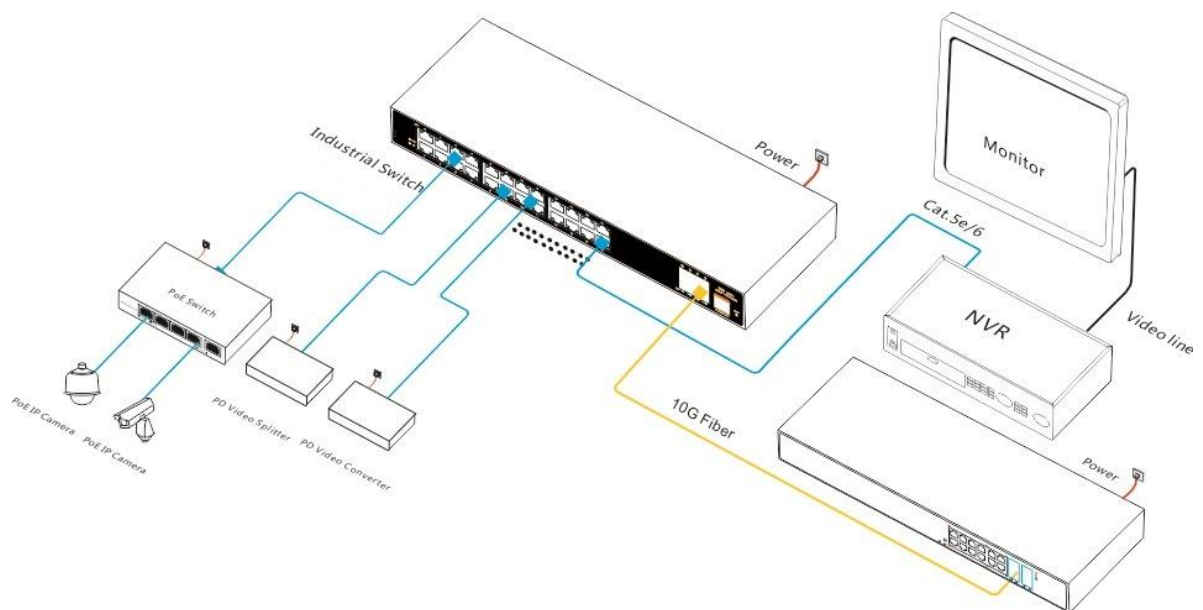

## ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-IPS58028FM	L3 managed industrial Ethernet fiber switch with 24*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).	2*60W

**Note:** The SFP optical module is not included by default and needs to be purchased separately.

## PACKING LIST

	Content	Qty	Unit
Packing List	28-port 10G uplink L3 managed industrial Ethernet switch	1	SET
	AC Power Cable	1	PC
	Mounting Kits	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G, multi-mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	2632-G	Industrial SFP optical module, 1.25G, single-mode dual fiber	PC

		1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	
	2612-T-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	2612-T-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	2613-R-G-SC	Industrial SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
10G Optical Module	6630-G	Industrial SFP+ optical module, 10G, multi-mode dual fiber 850nm, transmission distance: 300m, LC interface, support DDM function, support hot plug and pull.	PC
	7832-G	Industrial SFP+ optical module, 10G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-33-G	Industrial SFP+ optical module, 10G, single-mode single fiber TX1330nm/RX1270nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	7832-27-G	Industrial SFP+ optical module, 10G, Single-mode single fiber TX1270nm/RX13300nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC

## RELATED PRODUCT

Model	Description
ONV-IPS58036FM	L3 managed industrial Ethernet fiber switch with 16*10/100/1000M RJ45 ports and 8*10/100/1000M RJ45 or 8*100/1000M SFP combo ports and 4*1/10G SFP+ ports. Built-in 60W dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).
ONV-IPS58368FM	L3 managed industrial Ethernet fiber switch with 16*100/1000M SFP ports and 8*10/100/1000M RJ45 or 8*100/1000M SFP combo ports and 4*1/10G SFP+ ports. Built-in 60W dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).
ONV-IPS58052FM	L3 managed industrial Ethernet fiber switch with 48*10/100/1000M RJ45 ports and 4*1/10G SFP+ ports. Built-in 60W dual power supply. It support 1U/19-inch cabinet installation.

## CONTACT US

**ONV** Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

Website: [www.onvcom.com](http://www.onvcom.com)

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang

Street, Longhua District, Shenzhen

