

Product Datasheet

16-port 10G Uplink Managed Industrial Ethernet Switch (ONV-IPS56168FM)



OVERVIEW

The ONV-IPS56168FM is a 10G uplink managed industrial Ethernet fiber switch independently developed by ONV. It has 8*10/100/1000Base-T adaptive RJ45 ports and 4*100/1000Base-X uplink SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. Each port supports wire-speed forwarding.

The ONV-IPS56168FM has L3 network management functions, supports IPV4/ IPV6 management, dynamic routing and forwarding, complete security protection mechanism, perfect ACL/QoS strategy, and rich VLAN functions for easy management and maintenance. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS (<20ms) to improve link backup and network reliability. When a unidirectional network fails, communication can be quickly restored to ensure uninterrupted communication of important applications. Port management, routing address management, port flow control, VLAN division, IGMP, security strategy, and other

application business configurations can be performed through Web, CLI, SNMP, Telnet, and other network management methods according to application needs. It has excellent adaptability to industrial field environments (including mechanical stability, climate environment adaptability, electromagnetic environment adaptability, etc.). It is suitable for industrial scenarios such as intelligent transportation, rail transportation, power industry, mining, petroleum, shipping, metallurgy, and green energy construction to form economical, efficient, stable, and reliable communication networks.

FEATURE

■ Gigabit access, uplink 1/10G SFP+ fiber port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and 1/10G uplink SFP+ fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Strong business processing capability

- ◇ Support ERPS ring network and STP/ RSTP/ MSTP to eliminate layer 2 loops and realize link backup.
- ◇ Support IEEE802.1Q VLAN, Users can flexibly divide VLAN, Voice VLAN, and QinQ configuration according to their needs.
- ◇ Support static and dynamic aggregation to effectively increase link bandwidth, realize load balancing, link backup, and improve link reliability.
- ◇ Support QoS, port-based, 802.1P-based, and DSCP-based three priority modes and four queue scheduling algorithms: Equ, SP, WRR, and SP+WRR.
- ◇ Support ACL to filter data packets by configuring matching rule processing operations and time permissions, and provide flexible security access control policies.
- ◇ Support IGMP V1/V2/V3 multicast protocol, IGMP Snooping meets multi-terminal high-definition video surveillance and video conference access requirements.

■ Security

- ◇ Support port+MAC binding, IP+MAC+port binding functions.
- ◇ Support port isolation and port broadcast storm suppression.
- ◇ 802.1X authentication provides authentication functions for LAN computers and controls the authorization status of controlled ports according to the authentication results.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, SYS, and Link.
- ◇ Low power consumption, aluminum alloy housing, and excellent heat dissipation to ensure the stable operation of the switch.

■ Easy O&M management

- ◇ Support CPU monitoring, memory monitoring, Ping detection, and cable length detection.
- ◇ HTTPS, SSLV3, SSHV1/V2, and other encryption methods are more secure in management.
- ◇ RMON, system log, and port traffic statistics are convenient for network optimization and transformation.
- ◇ LLDP is convenient for the network management system to query and judge the communication status of the link.
- ◇ Support diverse management and maintenance methods such as Web network management, CLI command line (Console, Telnet), SNMP (V1/V2/V3), Telnet, etc.

TECHNICAL SPECIFICATION

Model	ONV-IPS56168FM
Interface Characteristics	
Fixed Port	1*Console port (115200, N, 8,1)

	Power failure alarm switch port (FAULT) 8*10/100/1000Base-T RJ45 ports (Data) 4*1/10G uplink SFP+ fiber ports (Data) 4*100/1000Base-X uplink SFP fiber ports (Data) 2*DC12-48V input ports (support reverse connection protection)
Ethernet Port	Port 1-8 can support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤ 100 meters) 100BASE-TX: Cat5 or later UTP (≤ 100 meters) 1000BASE-T: Cat5e/6 or later UTP (≤ 100 meters)
Optical Fiber Port	Default no include optical module (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Fiber Port Expansion	Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m(1G), 850nm/ 0-300m (10G), Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km
Chip Parameter	
Network Management Type	L3
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3ae 10GBase-SR/LR, IEEE 802.3x
Forwarding Mode	Store and forward (Full wire speed)
Switching Capacity	128Gbps (non-blocking)
Forwarding Rate@64byte	77.38Mpps
CPU(Hz)	800M
DRAM	1G
FLASH	128M
MAC	16K


Buffer Memory	12M
Jumbo Frame	12K
LED Indicator	System: SYS (Green), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings
Power Supply	
Power Consumption	Standby<8W, Full load<15W
Input Voltage/ Interface	DC12-48V, 6Pin industrial Phoenix terminal, support anti-reverse protection.
Power Supply	No, optional 24V/24W or 24V/36W industrial power supply
Physical Parameter	
Operation Temp/ Humidity	-40~75°C, 5%~90% RH non condensing
Storage Temp/ Humidity	-40~80°C, 5%~95% RH non condensing
Dimension (L*W*H)	166*150*75mm
Net /Gross Weight	1.8kg/ 2.1kg
Installation	Desktop, 35mm DIN Rail
Certification& Warranty	
Lightning Protection	IEC61000-4-3 (RS):10V/m (80-1000MHz) FCC Part 15/CISPR22 (EN55022): Class A IEC61000-6-2 (Common Industrial Standard) IEC61000-4-9 (Pulsed magnet field): 1000A/m IEC61000-4-10 (Damped oscillation): 30A/m 1MHz IEC61000-4-12/18 (Shockwave): CM2.5kV, DM1kV Protection level: IP40, Lightning protection: 6KV 8/20us IEC61000-4-4(EFT): Power cable: ±4kV, data cable: ±2kV IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s IEC61000-4-2 (ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz) IEC61000-4-8 (Power frequency magnetic field): 100A/m, 1000A/m, 1s-3s

	IEC61000-4-5 (Surge): Power cable: CM±4kV/ DM±2kV, data cable: ±4kV
Mechanical Properties	IEC60068-2-6 (Anti Vibration), IEC60068-2-27 (Anti Shock), IEC60068-2-32 (Free Fall)
Certification	CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class A, RoHS
Warranty	5 years, lifelong maintenance.
Network Management Feature	
Interface	<p>Port real-time flow management (Flow Interval)</p> <p>Broadcast storm suppression based on port rate</p> <p>SFP optical module DDMI real-time digital diagnosis</p> <p>Port IEEE Green Ethernet Energy-Saving configuration and status view</p> <p>IEEE802.3x flow control (Full duplex), Port exception protection mechanism</p> <p>Limit the rate of packet traffic on incoming and outgoing ports, the mini granularity is 16Kbps and max 1Gbps</p>
L3 Feature	<p>Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6</p> <p>VLANIF interfaces for IPV4/IPV6, up to 64 entries</p> <p>IPV4/IPV6 static routing/default routing, up to 64 entries</p> <p>NG protocol max 1000 entries, ARP protocol max 1000 entries</p> <p>IPV4 equal cost routing, VRRP for IPV4/IPV6, up to 255 entries</p> <p>IPV4 dynamic routing, RIPv1/v2, OSPFv2, routing 2000 entries</p> <p>L3 network management function, IPV4/ IPV6 dual-stack management</p> <p>L3 routing and forwarding, support communication between different network segments and different VLAN</p>
VLAN	<p>Port configuration of Access, Trunk, Hybrid, IEEE 802.1q</p> <p>Voice VLAN, GVRP VLAN protocol, Port-based VLAN (4K)</p> <p>Protocol-based VLAN, MAC address-based VLAN, QinQ configuration</p>
Port Aggregation	LACP dynamic aggregation, Static aggregation, Max 8 aggregation groups and max 8 ports per group.
Spanning Tree	<p>STP BPDU Guard, BPDU filtering and BPDU forwarding</p> <p>STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)</p>

ERPS Ring Network	ERPS ring network, Recovery time less than 20ms, ITU-T G.8032
Multicast	Multicast VLAN, User quick log out, MLD Snooping, MVR (Multicast VLAN Registration), IGMP Snooping v1/v2/v3 and 1024 multicast groups at most
Mirroring	Bidirectional traffic mirroring for basic ports one-to-multiple mirroring, supports up to 4 port sessions
QoS	Flow-based Rate Limiting, Flow-based redirection Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Packet Filtering, 8*Output queues of each port 802.1p/DSCP priority mapping, Diff-Serv QoS, Priority Mark/Remark
ACL	ACL is issued based on port and VLAN L2-L4 packet filtering function can match the first 80 bytes of the message and provide ACL definition based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port range, VLAN, etc.
Security	Port based IEEE802.1X authentication Port isolation, IP Source Guard function SSL guarantees data transmission security Quad binding function of IP+MAC+VLAN+ports MAC address learning limit, MAC address black hole Anti DoS attack, Port broadcast message suppression Hierarchical user management and password protection SSH 2.0 provides a secure encrypted channel for user login Host data backup mechanism, ARP intrusion detection function IP source address protection, ARP message speed limit function Support AAA, RADIUS, TACACS+ authentication (only supports authentication, not authorization and accounting)
DHCP	DHCP Client, DHCP Snooping, DHCP Server
Management	System work log, Link Layer Discovery Protocol HTTP, TFTP file upload and download management

	<p>NTP clock, Cable length detection, SNMP V1/V2/V3</p> <p>Ping detection, Web network management (HTTPS)</p> <p>ONV-NMS platform cluster management (LLDP+SNMP)</p> <p>One click recovery, View CPU real-time utilization status</p> <p>Console/ SSH/ Telnet/ CLI command line configuration</p>
System	<p>Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, Mac OS X) installed on each computer in the network</p> <p>Cat5 and above Ethernet cable</p>

DIMENSION

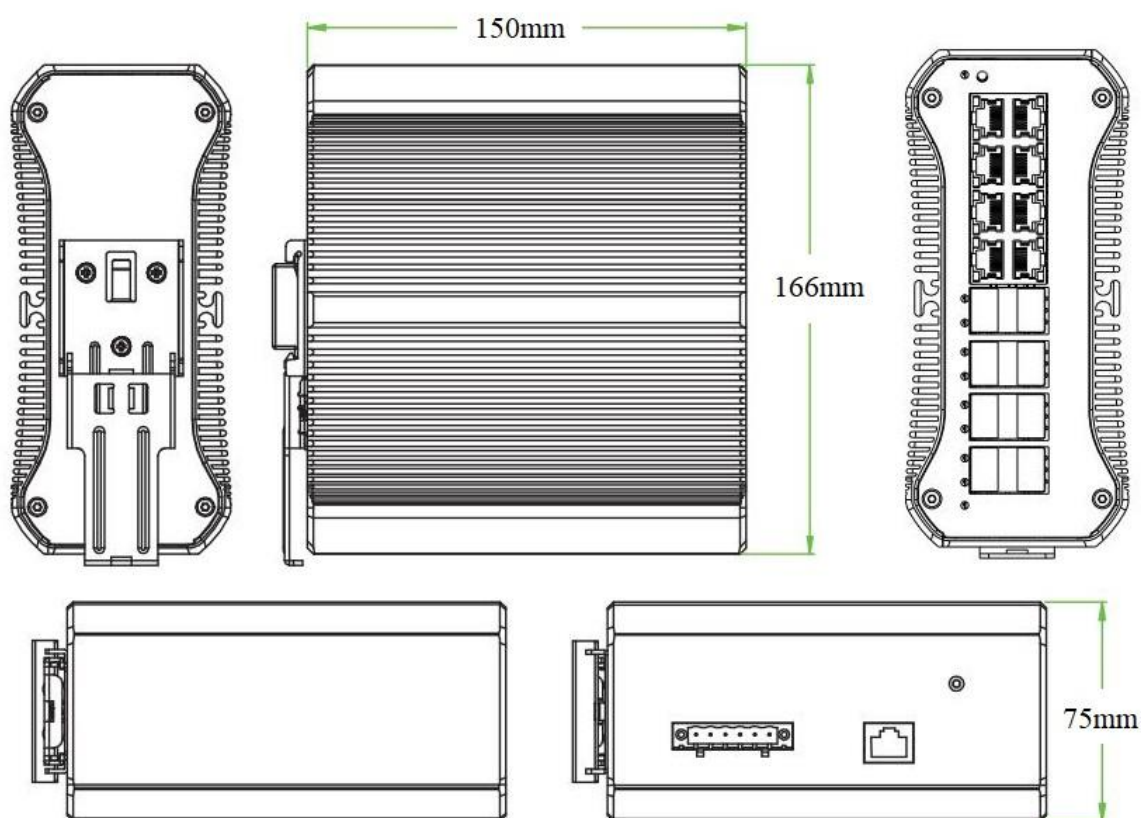

APPLICATION

ORDERING INFORMATION

Model	Description	Recommended Power Supply
ONV-IPS56168FM	L3 managed industrial Ethernet switch with 8*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports and 4*1/10G uplink SFP+ fiber ports. It can support dual DC redundant power input (Phoenix terminal connection) and DIN rail mounting.	24W/36W

Note: The optical module and power supply are not included and need to be purchased.

PACKING LIST

Packing List	Content	Qty	Unit
	16-port 10G uplink managed industrial Ethernet switch	1	Set
	RJ45-DB9 Adapter Cable	1	PC
	User Guide	1	PC
	Warranty Card and Certificate of Conformity	1	PC

OPTICAL MODULE

Product	Model	Description	Unit
1.25G Optical Module	2630-G	Industrial SFP optical module, 1.25G multi-mode dual fiber 850nm, transmission distance: 550m, LC interface. supports DDM function and hot plugging.	PC
	2632-G	Industrial SFP optical module, 1.25G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2612-T-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2613-R-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	2612-T-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1310nm/ RX1550nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC
	2613-R-SC-G	Industrial SFP optical module, 1.25G single-mode single fiber TX1550nm/ RX1310nm, transmission distance: 20km, SC interface. supports DDM function and hot plugging.	PC

10G Optical Module	6630-G	Industrial SFP+ optical module, 10G multi-mode dual fiber 850nm, transmission distance: 300m, LC interface. supports DDM function and hot plugging.	PC
	7832-G	Industrial SFP+ optical module, 10G single-mode dual fiber 1310nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-33-G	Industrial SFP+ optical module, 10G single-mode single fiber TX1330nm/ RX1270nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC
	7832-27-G	Industrial SFP+ optical module, 10G single-mode single fiber TX1270nm/ RX1330nm, transmission distance: 20km, LC interface. supports DDM function and hot plugging.	PC

POWER SUPPLY

Product	Model	Description	Unit
24W DIN Rail Industrial Power Supply	GWS-DP24-24	DIN Rail 24W single set of output power supply Input Voltage: AC100V-240V 50-60Hz, 0.35A Output Voltage: DC24V, 1.0A Operation Temperature: -40℃ to 70℃	PC
36W DIN Rail Industrial Power Supply	GWS-DP36-24	DIN Rail 36W single set of output power supply Input Voltage: AC100V-240V 50-60Hz, 0.56A Output Voltage: DC24V, 1.5A Operation Temperature: -40℃ to 70℃	PC

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Email: onv@onv.com.cn

Skype: [onv@onv.com.cn](https://www.skype.com/people/onv@onv.com.cn)

Teams: [onv@onv.com.cn](https://www.microsoft.com/en-us/teams/onv@onv.com.cn)

Website: www.onvcom.com

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: Building B3, Galaxy Artificial Intelligence Industrial Park, No. 333,

Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

